




25FRP

Term Tech Non-Insulated Flat Reducing Pin Terminal 25mm² Cable Entry



The Termination Technology range of uninsulated flat reducing pins are designed to terminate conductors into contact blocks. Manufactured from copper strip, rolled, brazed and tin plated. Available in a range of sizes from 10mm² to 95mm², also available in a range of round solid reducing pins.



**Termination
Technology Ltd**

Quality and Service

The company with the **RIGHT** connections at the **RIGHT** price.

Company Registration Number: 05062297

W: www.termtech.co.uk

T: 01179 354 900

E: sales@termtech.co.uk

Termination Technology Ltd, Unit 4C Crofts End Ind Estate, Crofts End Road,
Bristol BS5 7UW





Technical Data

Colour and Material

Material	Copper
Plating Material	Tin

Application Type, Size and Range


Cable Size (mm ²)	25
Number of Cables Accepted	1
Suitable Cable Type	Copper Cores




Dimensions

Dimension DØ (mm)	9.5
Dimension E (mm)	13.5
Dimension F (mm)	20
Dimension L (mm)	33.5
Dimension W (mm)	6.6
Product Thickness (mm)	1.2

Electrical Ratings

Max Current (A)	115
-----------------	-----



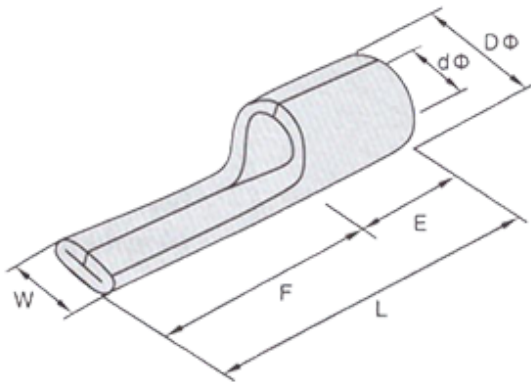

**Termination
Technology Ltd**

Quality and Service

The company with the **RIGHT** connections at the **RIGHT** price.

Company Registration Number: 05062297

W: www.termtech.co.uk

T: 01179 354 900

E: sales@termtech.co.uk

Termination Technology Ltd, Unit 4C Crofts End Ind Estate, Crofts End Road,
Bristol BS5 7UW

