Datasheet



BIMETPIN25

Term Tech Bi-Metallic Pin Terminal Aluminium Barrel Copper Pin 25mm² Cable



The Termination Technology range of Bi-Metal pins are suitable for terminating cables with aluminium conductors onto copper contacts without the risk of electrolytic corrosion and ensuring longevity. Supplied with a greased internal barrel and capped to prevent leakage. We would recommend using an indent crimper as aluminium is a softer metal than copper and the wall thickness of the lug is thicker to compensate.

Technical Data

Colour and Material

Body Material	Aluminum
Head Material	Electrolytic Copper
Application Type, Size and Range	
Cable Size (mm ²)	25
Dimensions	
Dimension d4 (mm)	7
Dimension L1 (mm)	42
Dimension L2 (mm)	25
Product Specification	
Specification	DIN 48201/DIN46329



The company with the RIGHT connections at the RIGHT price.

Company Registration Number: 05062297








W: www.termtech.co.uk T: 01179 354 900 E: sales@termtech.co.uk

Termination Technology Ltd, Unit 4C Crofts End Ind Estate, Crofts End Road, Bristol BS5 7UW





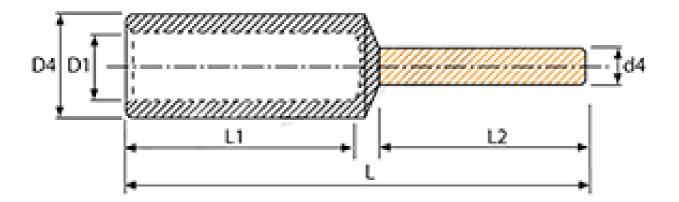



The company with the RIGHT connections at the RIGHT price.

Company Registration Number: 05062297







W: www.termtech.co.uk T: 01179 354 900 E: sales@termtech.co.uk

Termination Technology Ltd, Unit 4C Crofts End Ind Estate, Crofts End Road, Bristol BS5 7UW