Datasheet



BIMETPIN70

Term Tech Bi-Metallic Pin Terminal Aluminium Barrel Copper Pin 70mm² Cable



The Termination Technology range of Bi-Metal pins are suitable for terminating cables with aluminium conductors onto copper contacts without the risk of electrolytic corrosion and ensuring longevity. Supplied with a greased internal barrel and capped to prevent leakage. We would recommend using an indent crimper as aluminium is a softer metal than copper and the wall thickness of the lug is thicker to compensate.

Technical Data

Colour and Material

Body material	Aluminum	
Head Material	Electrolytic Copper	

Application Type, Size and Range

Cable Size (mm²) 70

Dimensions

Dimension d4 (mm)	12
Dimension L1 (mm)	50
Dimension I 2 (mm)	35

Product Specification

Specification DIN 48201/DIN46329



W: www.termtech.co.uk
T: 01179 354 900
E: sales@termtech.co.uk

The company with the RIGHT connections at the RIGHT price.

Termination Technology Ltd, Unit 4C Crofts End Ind Estate, Crofts End Road,
Bristol BS5 7UW



Company Registration Number: 05062297








Datasheet



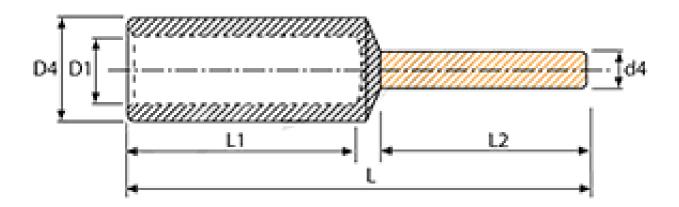



The company with the RIGHT connections at the RIGHT price.

Epim





W: www.termtech.co.uk
T: 01179 354 900

Bristol BS5 7UW

E: sales@termtech.co.uk
Termination Technology Ltd, Unit 4C Crofts End Ind Estate, Crofts End Road,