

HSB19GYELL

**Term Tech Heatshrink Box 2:1 Ratio 19.1mmØ
Expanded, 9.5mmØ Recovered Green/Yellow
(5m Box)**



The Termination Technology range of thin wall Cross linked Polyolefin Heatshrink is designed for commercial use with common uses including insulation, wire bundling, colour coding and mechanical protection. Available in a range of colours and sizes, supplied in a dispensable box.



**Termination
Technology Ltd**

Quality and Service

The company with the **RIGHT** connections at the **RIGHT** price.

Company Registration Number: 05062297

W: www.termtech.co.uk

T: 01179 354 900

E: sales@termtech.co.uk

Termination Technology Ltd, Unit 4C Crofts End Ind Estate, Crofts End Road,
Bristol BS5 7UW





Technical Data

Colour and Material

Material	Crosslinked Polyolefin
Colour	Green/Yellow

Dimensions

Led Flat Width (mm)	31
---------------------	----

Durability

Chemical Resistance	Resistant to common fluids and solvents
Fungus Resistance	Tested with no growth occurring

Electrical Ratings

Dielectric Strength (kV/mm)	Min 19.7 Tested to ASTM D-2671
Volume Resistivity (Ohm/cm)	Min 10 ¹³ Tested to ASTM D-876

Physical Attributes

Adhesive Lined	No
----------------	----

Product Specification


CE Compliant	Yes
RoHS Compliant	Yes


Quantities and Packaging

Packaging	Cardboard Dispensable Box
-----------	---------------------------

Temperature and Fire Information

Continuous Operating Temperature (°C)	-55 to +135
Shrink Temperature (°C)	+90 to Start Shrinking
Fire Rating	UL224 VW-1; MIL-I-23053/5 Class 1 & 3



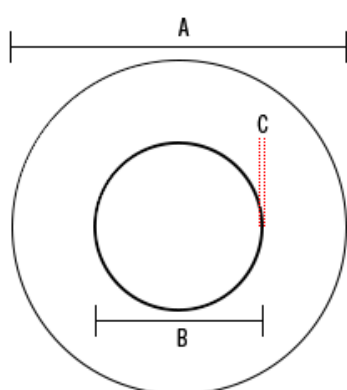

**Termination
Technology Ltd**

Quality and Service

The company with the **RIGHT** connections at the **RIGHT** price.

Company Registration Number: 05062297

W: www.termtech.co.uk

T: 01179 354 900

E: sales@termtech.co.uk

Termination Technology Ltd, Unit 4C Crofts End Ind Estate, Crofts End Road,
Bristol BS5 7UW

