Datasheet



T2.5-6

Term Tech Copper Tube Terminal 2.5mm² Cable 6mm Hole (Unit 100)



The Termination Technology range of standard copper tube terminals is manufactured from seamless copper tube to BS2871/C106. All terminals are provided with an inspection hole to ensure the conductor is fully inserted before crimping. A bell mouth also ensures a smooth transition from lug to cable, thus avoiding the problems of chafing where the component is subject to vibration. Narrow Palm, Right Angled, Long Palm and more specialist ranges also available.

Technical Data

Colour and Material

Material	Copper
Plating Material	Tin
Application Type, Size and Range	
Cable Size (mm²)	2.5
Dimensions	
Dimension D (mm)	2.4
Dimension L (mm)	21
Dimension W (mm)	10
Fixing Hole (mm)	6

Product Specification

Specification BS EN 61238-1 2003, IEC 61238-2003, BS2781/C106




W: www.termtech.co.uk
T: 01179 354 900
E: sales@termtech.co.uk

The company with the RIGHT connections at the RIGHT price.

Termination Technology Ltd, Unit 4C Crofts End Ind Estate, Crofts End Road,

Bristol BS5 7UW










Datasheet



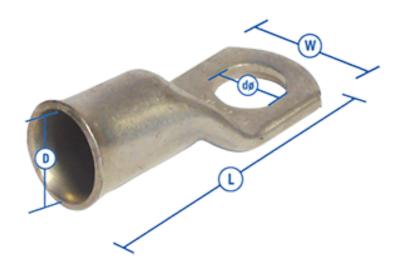



The company with the RIGHT connections at the RIGHT price.

Epim





Bristol BS5 7UW