


EBC210

Term Tech 10 Way 2 Link Earth Bar 50mm x 6mm Copper M10 Studs 650mm Length



The Termination Technology of Dual Link Earth Bars are manufactured to order in house, providing a convenient earthing point for electrical installations requiring an Earthing and Lightning protection system. Assembled with 50mm x 6mm copper mounted on an aluminium base plate using stand off insulators. Standard configuration used of 10x M10 studs between the links and 1x M10 after each link, all spaced at 35mm centres. The disconnection links are used to offer a break in the connection to earth to allow for the testing of an earth rod whilst disconnected from the Lightning and Earthing protection system.

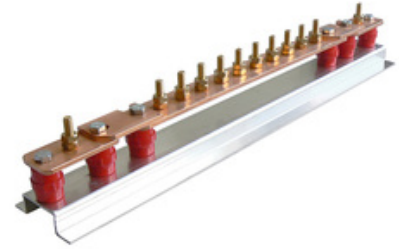

**Termination
Technology Ltd**

Quality and Service

The company with the **RIGHT** connections at the **RIGHT** price.

Company Registration Number: 05062297

W: www.termtech.co.uk

T: 01179 354 900

E: sales@termtech.co.uk

Termination Technology Ltd, Unit 4C Crofts End Ind Estate, Crofts End Road, Bristol BS5
7UW



Technical Data

Colour and Material

Material	Copper
Baseplate Material	Aluminium
Plating Material	None

Application Type, Size and Range

Bolt Size (mm)	10
----------------	----

Dimensions

Bar Size (mm)	50x6
Baseplate Width (mm)	89
Bolt Spacings (mm)	35
Product Height (mm)	83
Product Length (mm)	650

Discernible Features

Mounting Style	Surface
----------------	---------

Electrical Ratings

Max Current (A)	1000
-----------------	------

Product Layout

Workable Ways	12
Number of Links	2
Number of Insulators	6

Product Specification

Specification	BS:EN 13601 Compliant
---------------	-----------------------

